




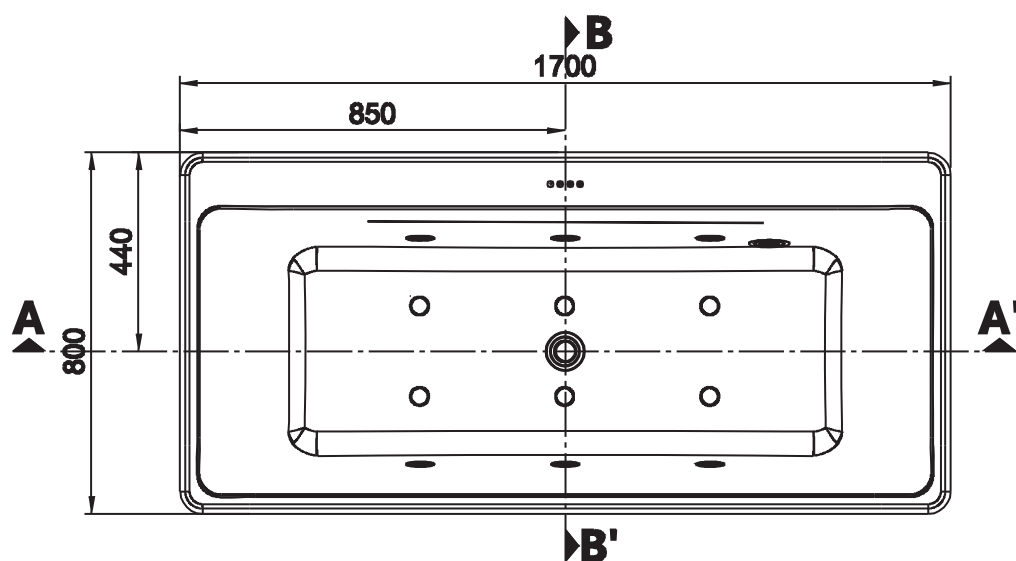

Vista in pianta
plan view

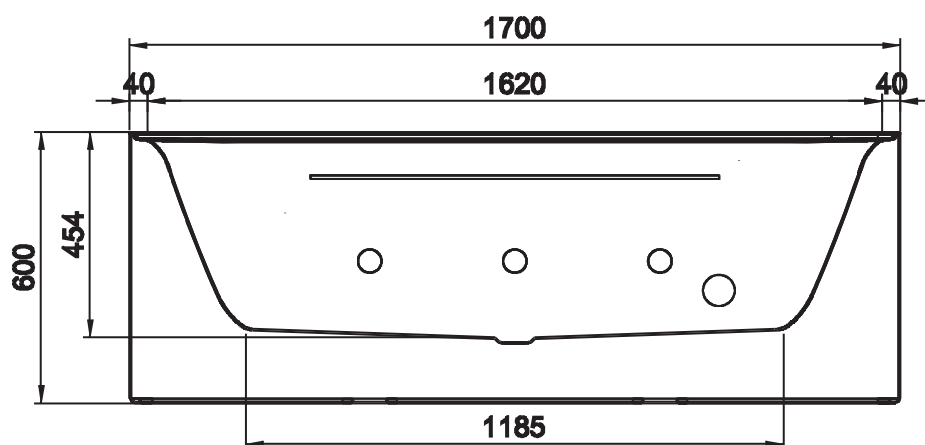


Sezione A/A'
Section A/A'

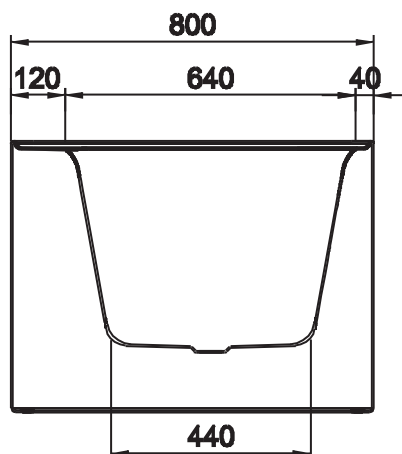

Sezione B/B'
Section B/B'

Colacril

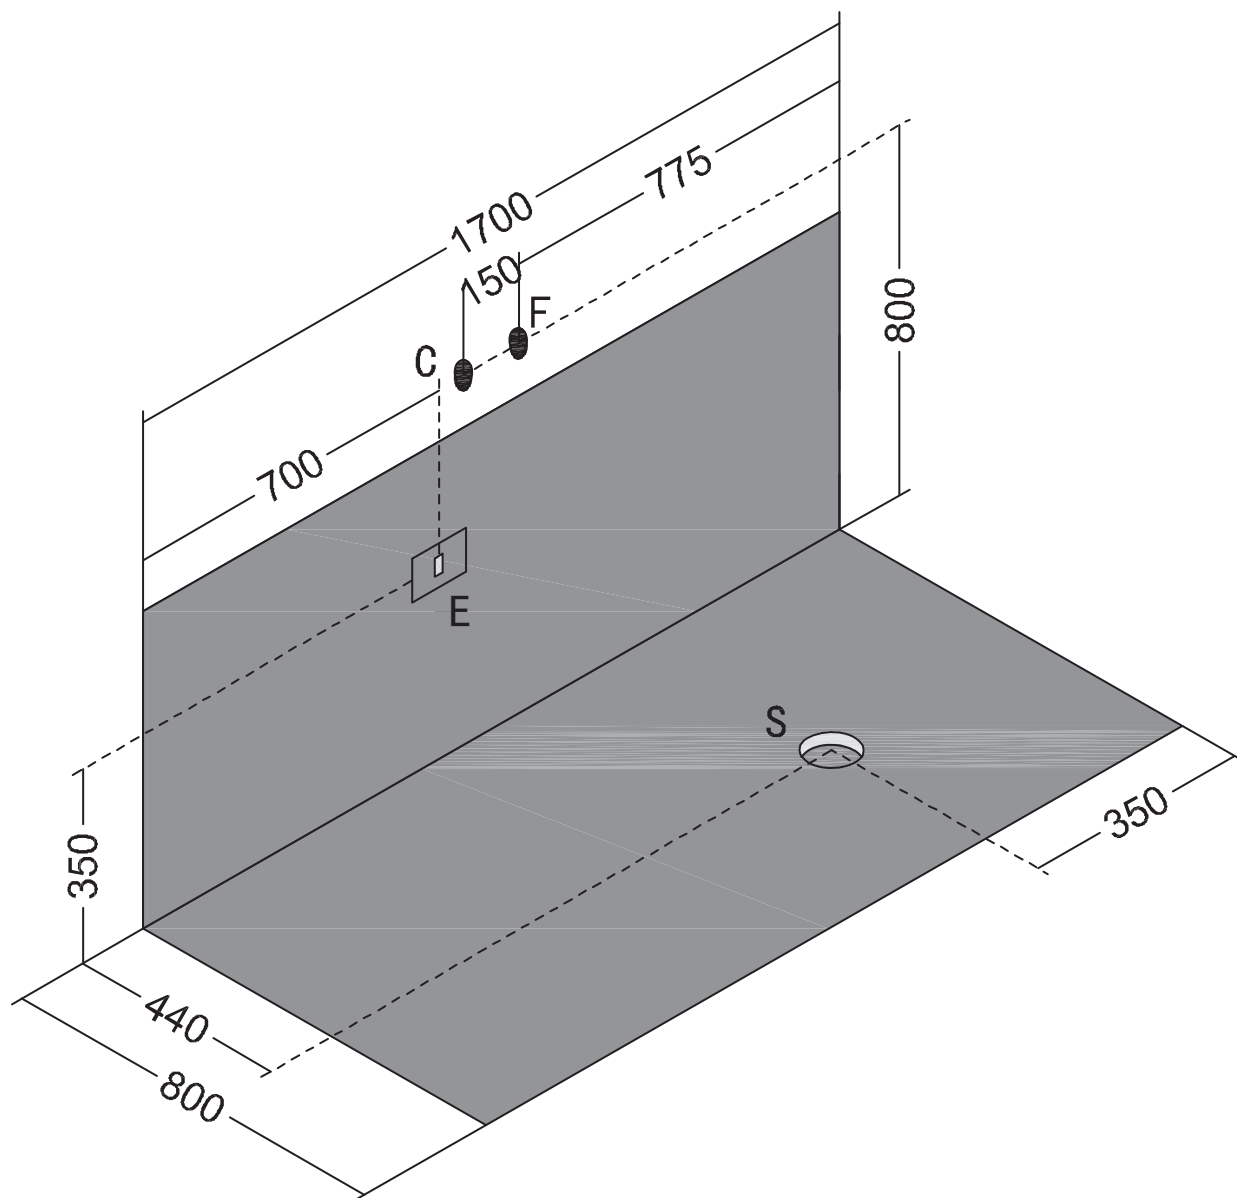

Ingombro vasca proiettato nel muro

Bath overall dimensions as projected on the wall

Colacril

I	CARATTERISTICHE IDRAULICHE	CARATTERISTICHE ELETTRICHE	REQUISITI DI PREINSTALLAZIONE	
N.B. L'INSTALLAZIONE DEVE AVVENIRE A PAVIMENTO E PARETI FINITE	Numero jets: 12	V 220/240	C : Allaccio acqua calda rubinetteria parete:	1/2"
Peso netto: Kg 86 Peso spedizione: Kg 112 Volume spedizione: m3 = 1,299 Contenuto acqua Lt 247		HZ 50/60	F : Allaccio acqua fredda rubinetteria parete:	1/2"
		KW 0.78	S : Allaccio scarico incassato a pavimento:	1-1/2"
		A 5	E : Allaccio elettrico idromassaggio	IPX5
GB	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED	Numero jets: 12	V 220/240	C : Wall taps outlet for hot water:	1/2"
Net weight: Kg 86 total weight with package: Kg 112 Volume with package: m3 = 1,299 Water capacity Lt 247		HZ 50/60	F : Wall taps outlet for cold water:	1/2"
		KW 0.78	S : Drainage outlet istalled in the floor:	1-1/2"
		A 5	E : Power outlet for the wirpool	IPX5
F	WATER SYSTEM SPECIFICATION	POWER SYSTEM SPECIFICATION	CONDITION REQUIRED BEFORE THE INSTALLATION	
N.B. THE INSTALLATION MUST BE CARRIED OUT WITH FLOOR AND WALLS ALRESDY TILED	Numero jets: 12	V 220/240	C : Wall taps outlet for hot water:	1/2"
Net weight: Kg 86 total weight with package: Kg 112 Volume with package: m3 = 1,299 Water capacity Lt 247		HZ 50/60	F : Wall taps outlet for cold water:	1/2"
		KW 0.78	S : Drainage outlet istalled in the floor:	1-1/2"
		A 5	E : Power outlet for the wirpool	IPX5